


KS604

Sending box

Version: v1.2

Release Date: November 2021

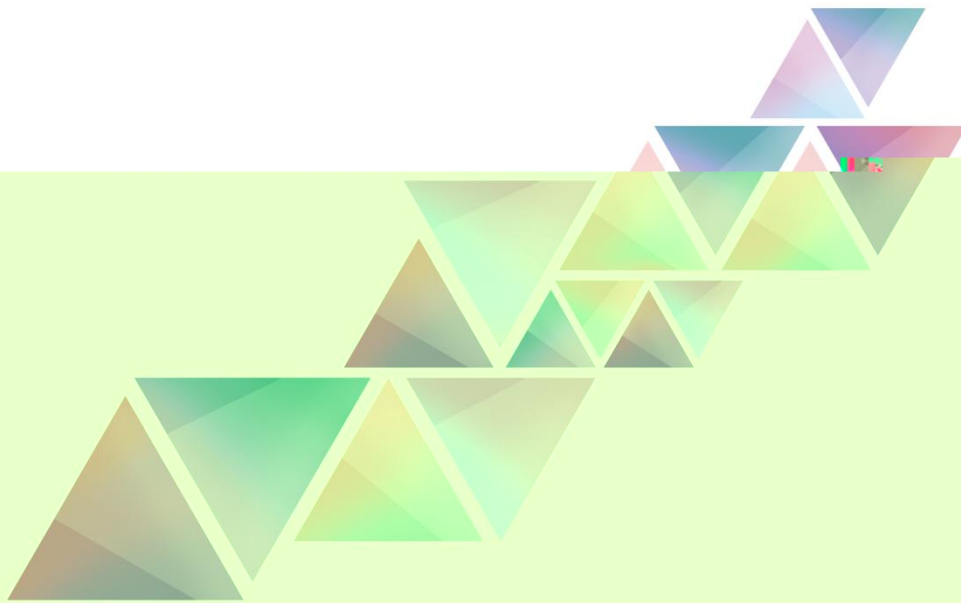


Beijing KYSTAR

Beijing KYSTAR

Version record

version number	Change details	release time
V1.0	first release	2014.07.01
V1.1	change cover	2021.10.25
V1.2	Correct size data	2021.11.18

Overview

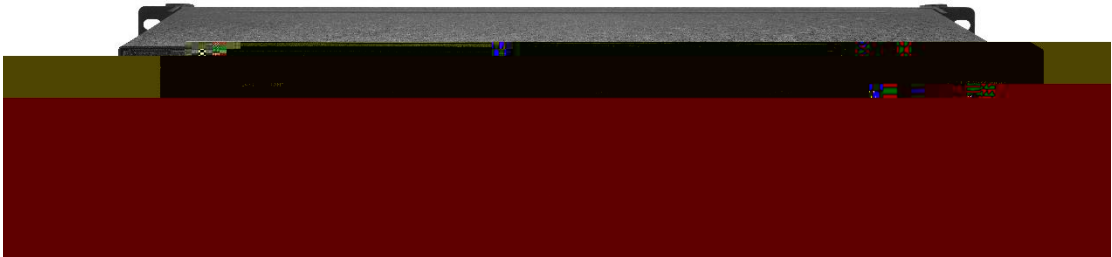

Functional characteristics

- Independent power supply and installation of 4 small transmission cards
- Two independent DVI splitters, one divided into two
- 1.5U c_5U

Port specification

Input port																
Type	Quantity	specification														
DVI	2	<p>Standard DVI-D socket, 18+1 pinhole; DVII.1; TMSD level, single pixel input, 165MHz bandwidth;</p> <p>Support resolution:</p> <table border="0"> <tr> <td>2560×1024 @60Hz</td> <td>1536×1536 @60Hz</td> </tr> <tr> <td>2048×1152 @60Hz</td> <td>1920×1200 @60Hz</td> </tr> <tr> <td>1920×1080 @60Hz</td> <td>1680×1050 @60Hz</td> </tr> <tr> <td>1600×1200 @60Hz</td> <td>1440×900 @60Hz</td> </tr> <tr> <td>1400×1050 @60Hz</td> <td>1366×768 @60Hz</td> </tr> <tr> <td>1360×768 @60Hz</td> <td>1280×1024 @60Hz</td> </tr> <tr> <td>1280×800 @60Hz</td> <td>1024×768 @60Hz</td> </tr> </table> <p>And custom resolution in the range of 2560×1024 @60Hz</p>	2560×1024 @60Hz	1536×1536 @60Hz	2048×1152 @60Hz	1920×1200 @60Hz	1920×1080 @60Hz	1680×1050 @60Hz	1600×1200 @60Hz	1440×900 @60Hz	1400×1050 @60Hz	1366×768 @60Hz	1360×768 @60Hz	1280×1024 @60Hz	1280×800 @60Hz	1024×768 @60Hz
2560×1024 @60Hz	1536×1536 @60Hz															
2048×1152 @60Hz	1920×1200 @60Hz															
1920×1080 @60Hz	1680×1050 @60Hz															
1600×1200 @60Hz	1440×900 @60Hz															
1400×1050 @60Hz	1366×768 @60Hz															
1360×768 @60Hz	1280×1024 @60Hz															
1280×800 @60Hz	1024×768 @60Hz															

Output port																
Type	Quantity	specification														
DVI-D	4	<p>Standard DVI-D socket, 18+1 pinhole; DVII.1; TMSD level, single pixel input, 165MHz bandwidth;</p> <p>Support resolution:</p> <table border="0"> <tr> <td>2560×1024 @60Hz</td> <td>1536×1536 @60Hz</td> </tr> <tr> <td>2048×1152 @60Hz</td> <td>1920×1200 @60Hz</td> </tr> <tr> <td>1920×1080 @60Hz</td> <td>1680×1050 @60Hz</td> </tr> <tr> <td>1600×1200 @60Hz</td> <td>1440×900 @60Hz</td> </tr> <tr> <td>1400×1050 @60Hz</td> <td>1366×768 @60Hz</td> </tr> <tr> <td>1360×768 @60Hz</td> <td>1280×1024 @60Hz</td> </tr> <tr> <td>1280×800 @60Hz</td> <td>1024×768 @60Hz</td> </tr> </table> <p>And a custom resolution in the range of 2560×1024 @60Hz</p>	2560×1024 @60Hz	1536×1536 @60Hz	2048×1152 @60Hz	1920×1200 @60Hz	1920×1080 @60Hz	1680×1050 @60Hz	1600×1200 @60Hz	1440×900 @60Hz	1400×1050 @60Hz	1366×768 @60Hz	1360×768 @60Hz	1280×1024 @60Hz	1280×800 @60Hz	1024×768 @60Hz
2560×1024 @60Hz	1536×1536 @60Hz															
2048×1152 @60Hz	1920×1200 @60Hz															
1920×1080 @60Hz	1680×1050 @60Hz															
1600×1200 @60Hz	1440×900 @60Hz															
1400×1050 @60Hz	1366×768 @60Hz															
1360×768 @60Hz	1280×1024 @60Hz															
1280×800 @60Hz	1024×768 @60Hz															

Machine specification	
Input power	100-240V AC~50/60Hz 1.0A
Operating temperature	-20 ~85
Working humidity	0 ~40
Dimensions	483×340×67mm L×W×H
net weight	5KG
Machine power consumption	50W

Accessories: Equipment Dimensions

