


LS 4P

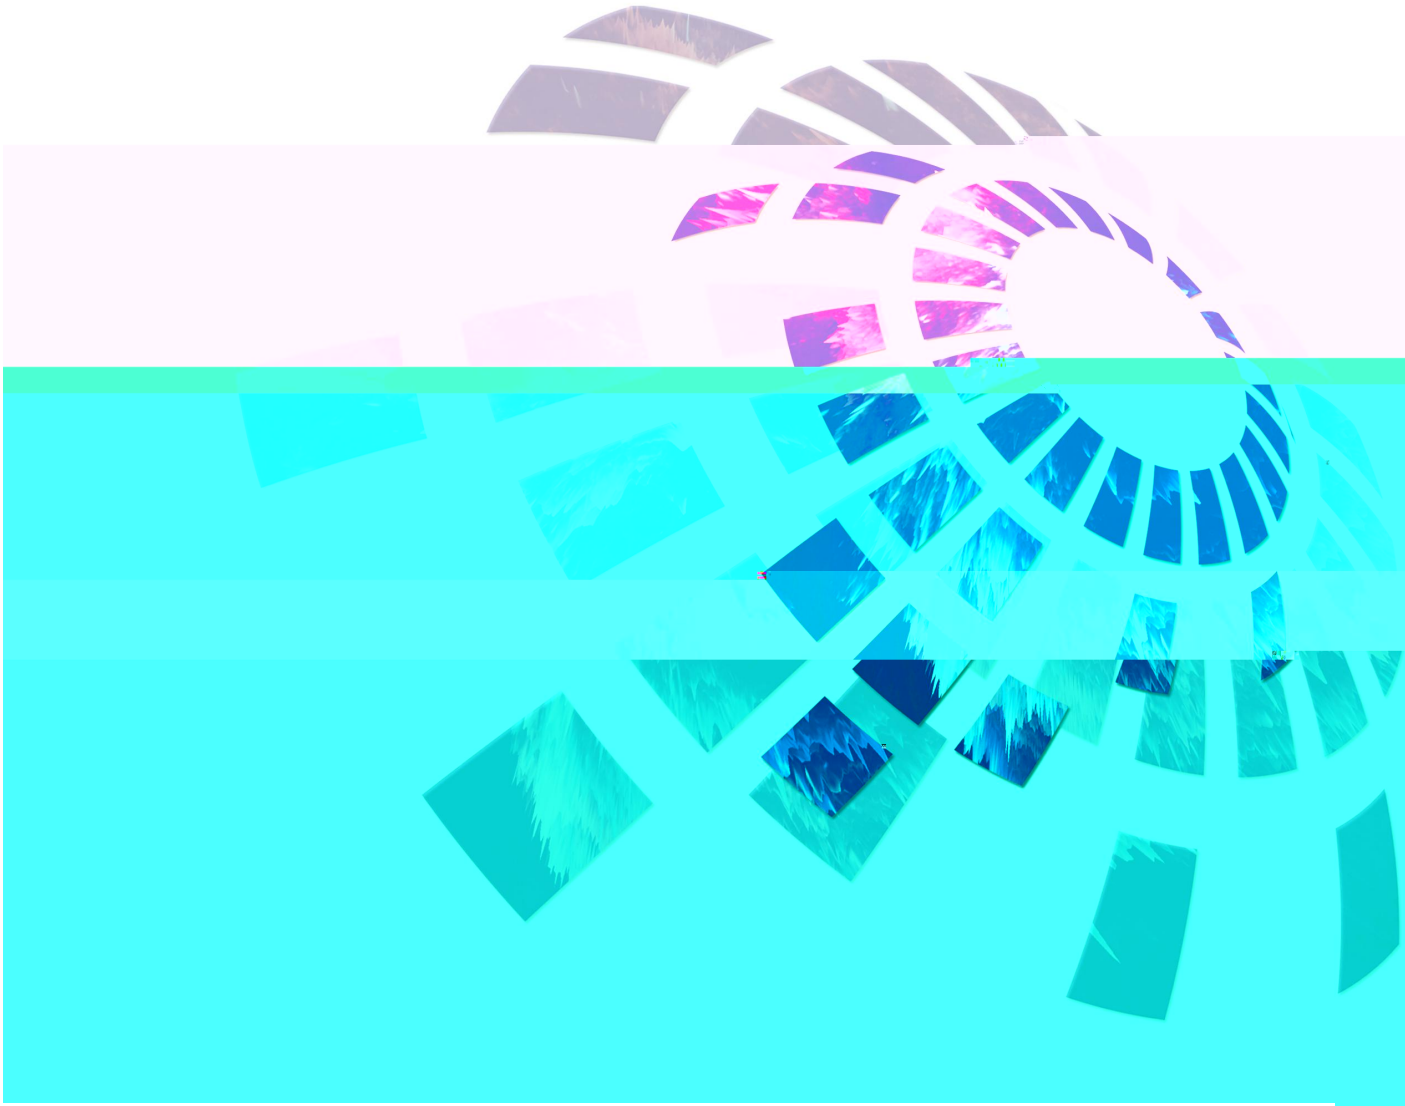


000000

Beijing KYSTAR


Version record

version number	Change details	release time
V1.0	first release	2019.11.28
V2.0	Modify device interface information	2020.06.12
V2.1	Replacement Equipment Dimensions Modify Device Loading Information	2020.12.09
V2.2	change cover	2021.10.25
V2.3	Correct size data, modify function description	2021.11.18



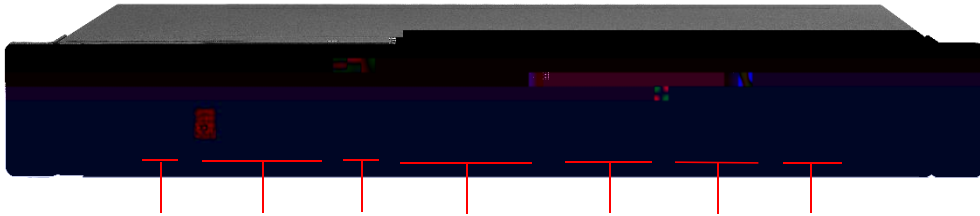

Serial number	Function Description
	Power switch
	LCD screen
	WIN 1/WIN2 window selection button
	Signal source quick selection area
	PIP adjustment, mode call, OUT one-button black screen, panoramic and part
	Set menu, navigation, confirmation, cancel function button
	Knob adjustment, vertical press can be used as OK button

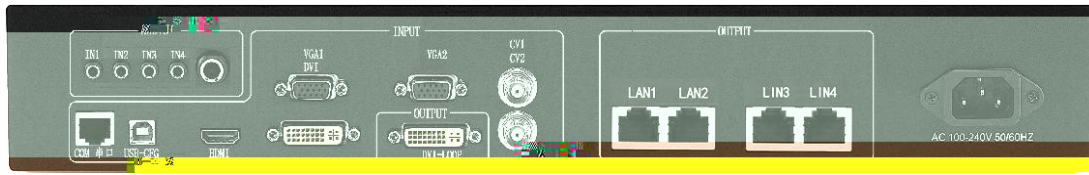

Input port		
Type	Number	Specification
CVBS BNC	2	NTSC/PAL adaptive, support 3D comb filter
VGA	2	VESA standard, maximum support 1920×1080@ 60Hz
DVI	1	1.3 standard, maximum support 1920×1080@ 60Hz
HDMI	1	1.3A standard, maximum support 1920×1080@ 60Hz
1/8" TRS Audio	4	3.5mm stereo interface, 2.0Vp-p / 10 K

Output port		
Type	Number	Specification
LAN	4	LAN port, used to transfer data to the receiving card, the maximum load is 2.42 million
DVI-LOOP	1	Loop out the DVI signal, exactly the same as the DVI input source
1/4" TRS Audio	1	6.3mm stereo interface, 2.0Vp-p / 10 K

Control port		
Type	Number	Specification
USB Type-B	1	USB-CFG interface for connecting PC host computer control
UART RJ-45	1	RS232 commander

Machine specification	
Input power	100-240VAC 50/60Hz 0.6A
Operating temperature	0-45
Size	483× 324.5× 73mm L×W×H
weight	5KG
Machine power consumption	36W

